




SILVER VERSION

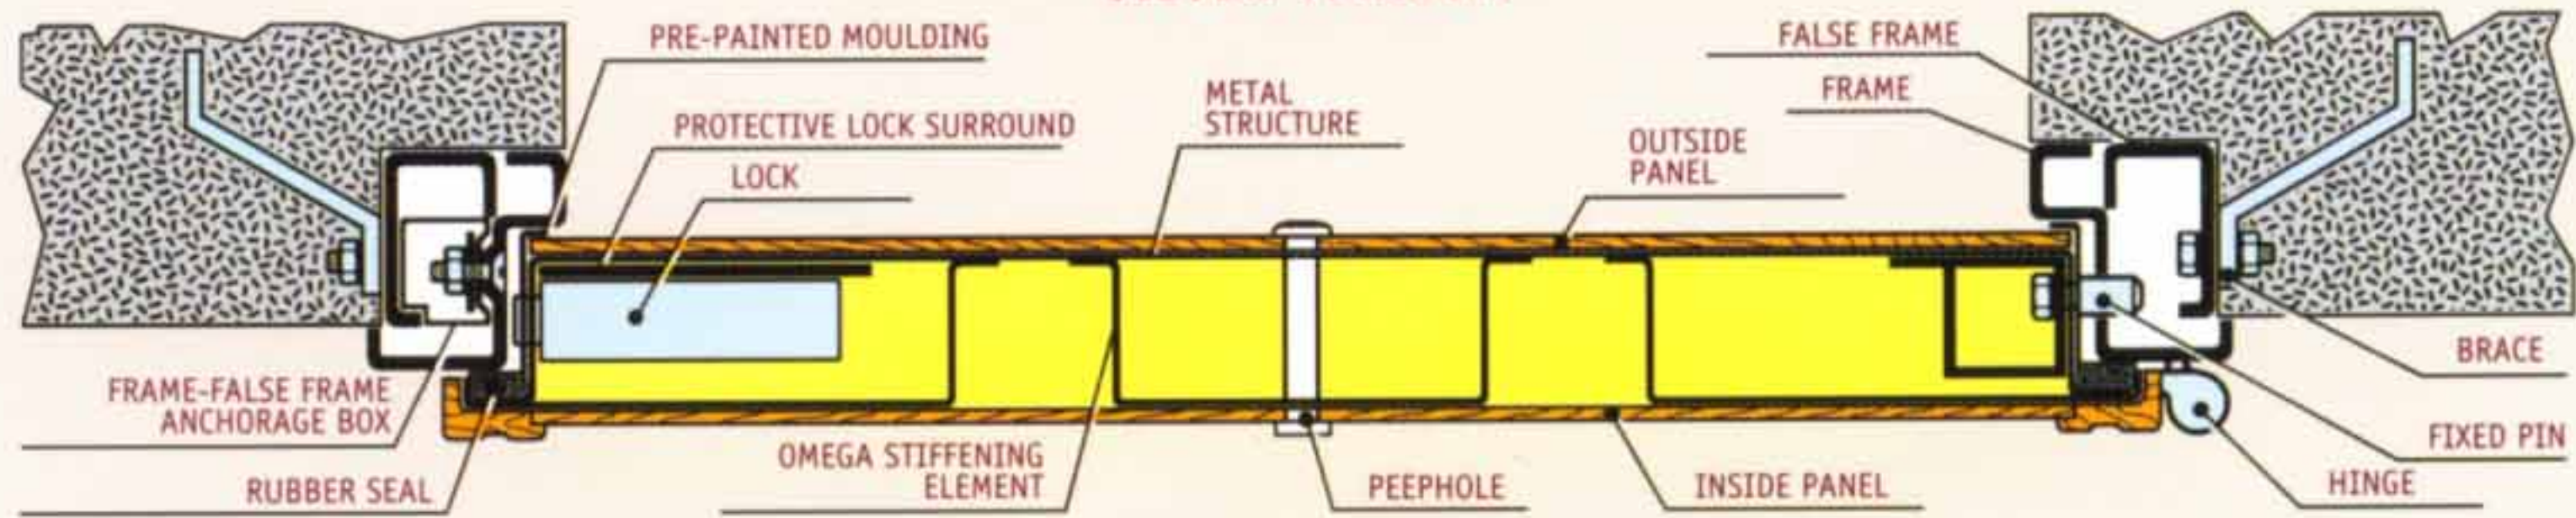

GOLD VERSION

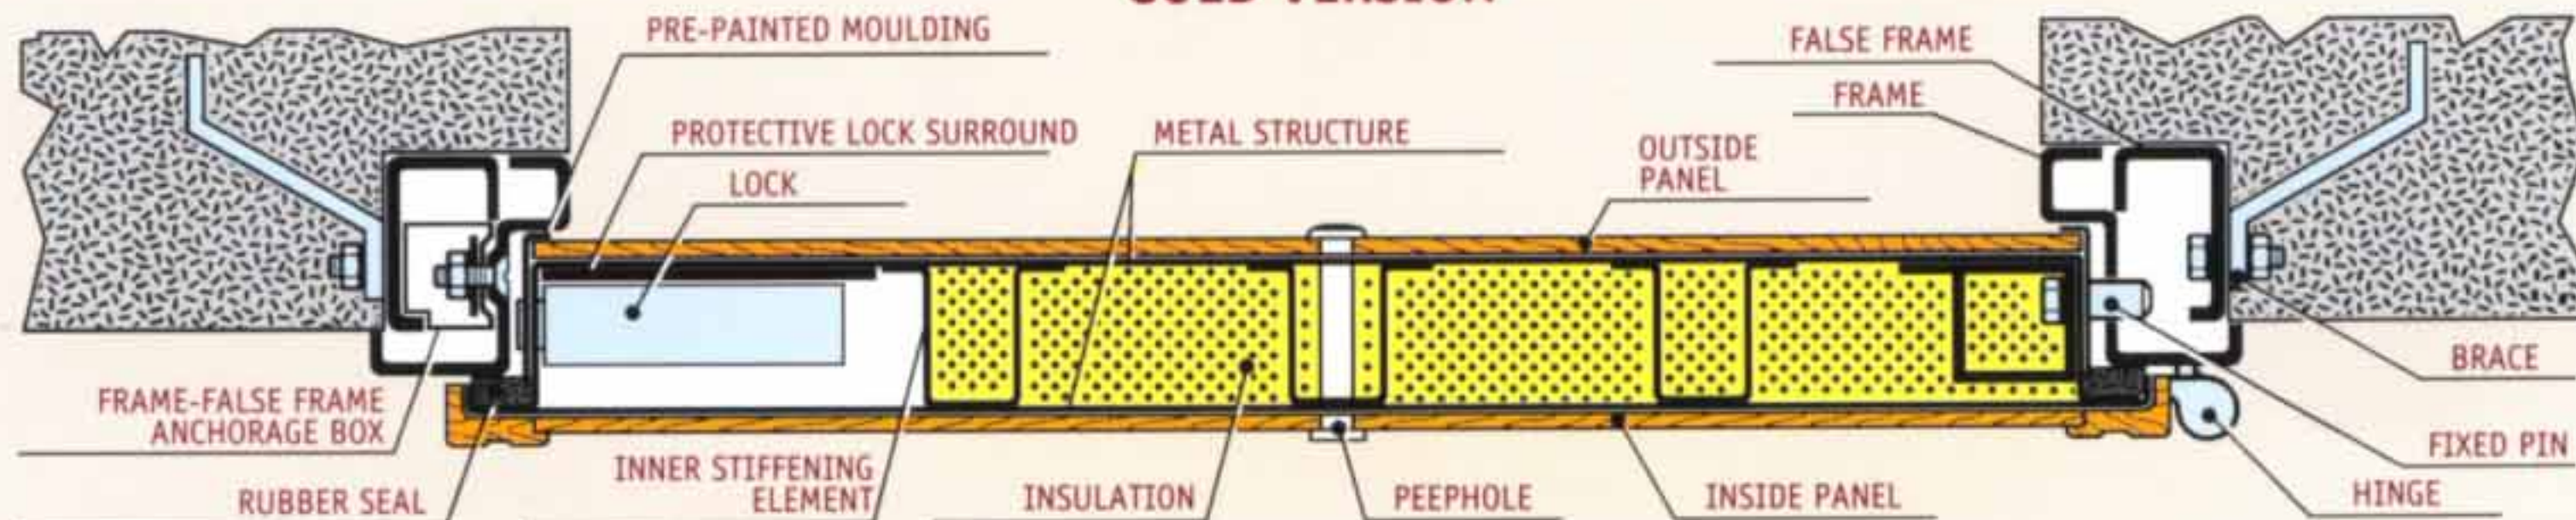

TRADITIONAL FRAME AND FALSE FRAME

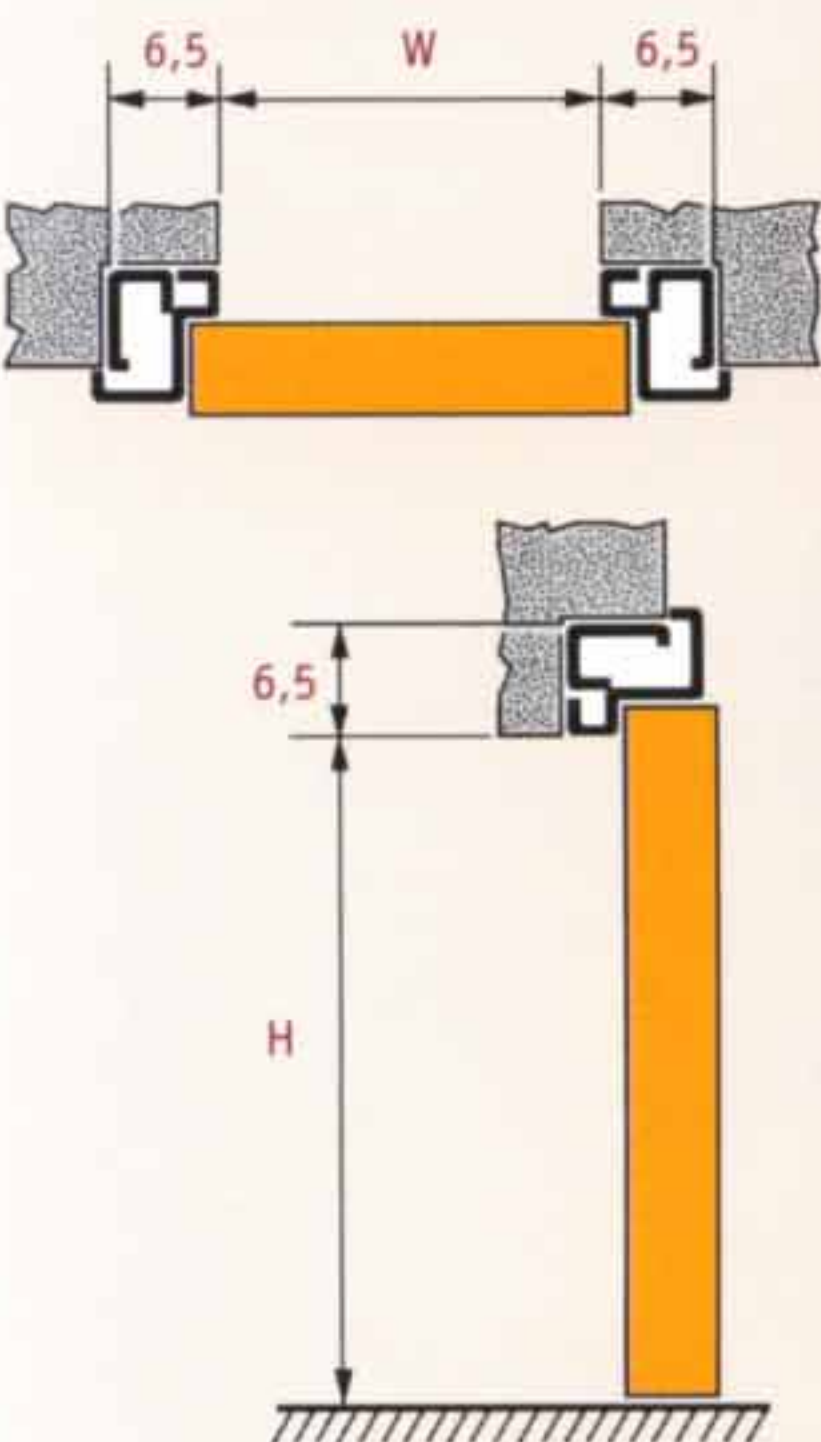

STRUCTURE OF THE DOOR

SILVER Series doors are built of an external reinforced press-formed steel panel, stiffened with sturdy vertical omega elements.

GOLD Series doors are characterized by a double insulated sheet, stiffened internally with sturdy vertical omega elements.

LEAF

The leaf is fitted with two sturdy adjustable hinges and 5 fixed bolts, which slot into the frame when closed.

A drill-proof plate protects the lock.

The mouldings holding the external panels in place are painted dark brown.

A soft rubber seal in the fold of the inside sheet keeps air, dust and noise out.

Standard equipment: fish-eye peephole, and burnished inside handle and outside knob.

Safety opening and draught excluder: standard equipment on the GOLD Series, options on the SILVER Series.

FRAME AND FALSE FRAME

The sheet steel frame and false frame are supplied painted dark brown. They are bolted together in a single piece and become solid with the masonry in which the door is mounted. They are adjustable in height and depth, and guarantee practical, fast installation.

STANDARD MEASUREMENTS

NET CLEARANCE (cm)			
H	209	209	209
W	79.5	84.5	89.5

